

DC-DC Step-Down Converter



Summary & Applications

This product is designed to provide a reduced supply to power auxiliary electrical systems, is configured specifically for electric vehicles. The NQZB Series DC/DC Converters achieve unmatched power levels of high efficiency and safety.

The devices provide provide a regulated output of 12.5 or 24.5 volts for vehicles lamps and solar applications etc, also provides 13.5 or 27.0 volts for charging auxiliary batteries.

Features

- ◆ Replace diode rectification with synchronous, over 93% efficient as high power density
- ◆ Available for maximum pulse power exceeds 120% of the nominal rating
- ◆ Wide voltage input , suitable for battery applications (cell voltage of 1.65V ~ 2.50V)
- ◆ Smaller, lighter and significantly more quiet than conventional converters
- ◆ Short circuit / overload output protection (resume after the short circuit disappear)
- ◆ Applicable to a variety of environmental , protection class IP54


© Copyright DCI All Rights Reserved

Address: A905, Jianye Building,NO.96 Xiangxing Rd., Xiang'an District, Xiamen, China

Naming rules

The naming rules of DC-DC converter in Figure 1.

NQ ZB □ □ □ - □ □ □ - □ □ □ □

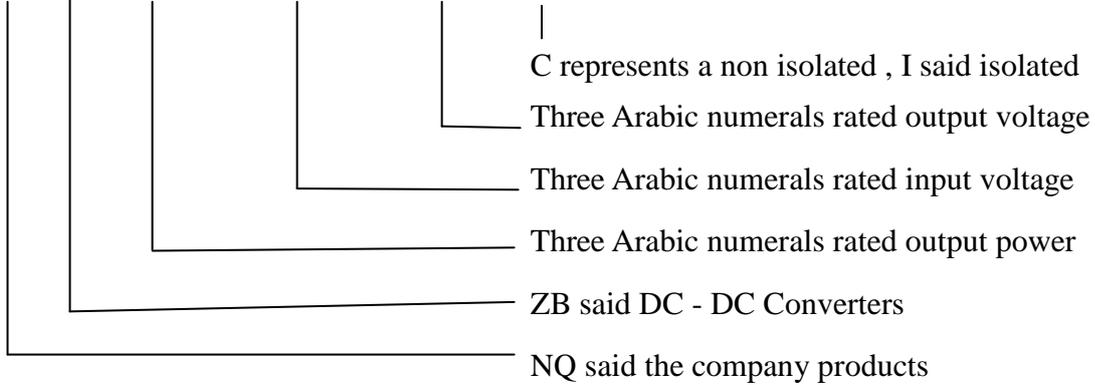

Specification

◆ <60V input range converters major technical indicators

Model	Input Voltage	Input Voltage	Output Voltage	Output Current	Size (L)		
NQZB200-012-024C	12	9.6~14.4V	24V	0~10A	160mm		
NQZB150-024-012C	24V	19.2V~28.8V	12V	0~15A	100mm		
NQZB200-024-012C			12V	0~20A	140mm		
NQZB250-024-012C			12V	0~25A	140mm		
NQZB300-024-012C			12V	0~30A	160mm		
NQZB100-036-012C			36V	27V~45V	12V	0~10A	100mm
NQZB200-036-012C	12V	0~20A			140mm		
NQZB250-036-012C	12V	0~25A			140mm		
NQZB300-036-012C	12V	0~30A			160mm		
NQZB400-036-012C	12V	0~40A			200mm		
NQZB300-036-024C	24V	0~15A			140mm		
NQZB400-036-024C	24V	0~20A			160mm		
NQZB600-036-024C	24V	0~30A			180mm		
NQZB167-048-005C	48V	36V~60V			05V	0~40A	180mm

NQZB100-048-012C			12V	0~10A	100mm
NQZB200-048-012C			12V	0~20A	140mm
NQZB250-048-012C			12V	0~25A	140mm
NQZB300-048-012C			12V	0~30A	160mm
NQZB400-048-012C			12V	0~40A	200mm
NQZB300-048-024C			24V	0~15A	140mm
NQZB400-048-024C			24V	0~20A	160mm
NQZB600-048-024C			24V	0~30A	180mm

◆ >60V input range converters major technical indicators

Model	Input Voltage	Input Voltage	Output Voltage	Output Current	Size (L)
NQZB200-012-024C	12	9.6~14.4V	24V	0~10A	160mm
NQZB150-024-012C	24V	19.2V~28.8V	12V	0~15A	100mm
NQZB200-024-012C			12V	0~20A	140mm
NQZB250-024-012C			12V	0~25A	140mm
NQZB300-024-012C			12V	0~30A	160mm
NQZB100-036-012C	36V	27V~45V	12V	0~10A	100mm
NQZB200-036-012C			12V	0~20A	140mm
NQZB250-036-012C			12V	0~25A	140mm
NQZB300-036-012C			12V	0~30A	160mm
NQZB400-036-012C			12V	0~40A	200mm
NQZB300-036-024C			24V	0~15A	140mm
NQZB400-036-024C			24V	0~20A	160mm
NQZB600-036-024C			24V	0~30A	180mm
NQZB167-048-005C	48V	36V~60V	05V	0~40A	180mm
NQZB100-048-012C			12V	0~10A	100mm
NQZB200-048-012C			12V	0~20A	140mm
NQZB250-048-012C			12V	0~25A	140mm


NQZB300-048-012C			12V	0~30A	160mm
NQZB400-048-012C			12V	0~40A	200mm
NQZB300-048-024C			24V	0~15A	140mm
NQZB400-048-024C			24V	0~20A	160mm
NQZB600-048-024C			24V	0~30A	180mm

Mode of connection


Isolated power ports defining and wiring as shown below

Port number	Color	Port Definition
1	red	input positive
2	yellow	Key Switch(if no key switch , please connect input positive)
3	black	Input & output negative
4	green	output Positive


Non Isolated DC/DC Converter
Mode of Connection

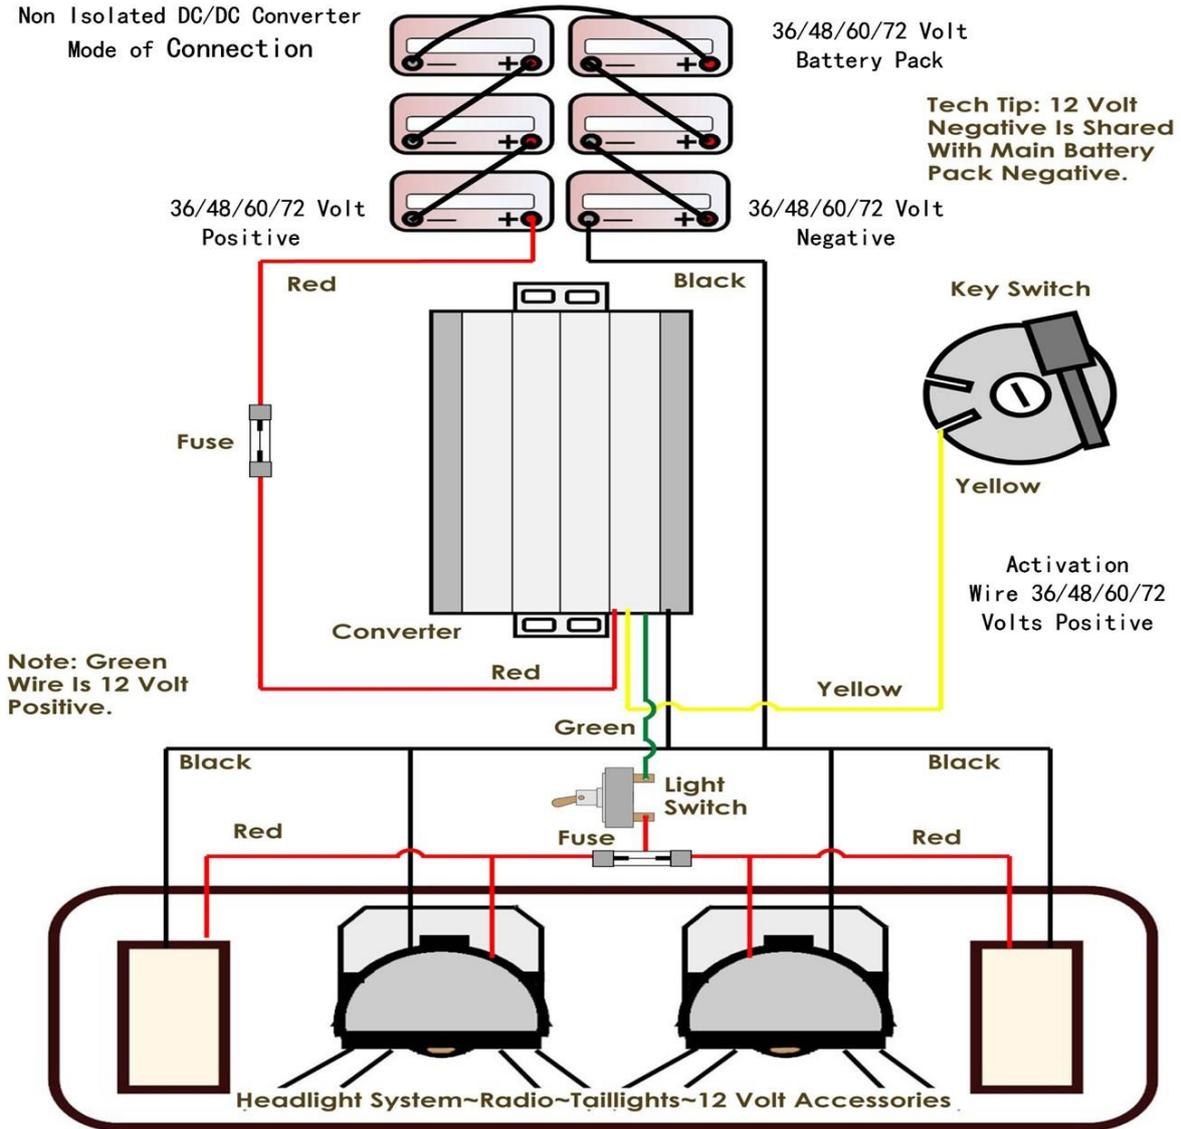

Installation size (Unit: mm)

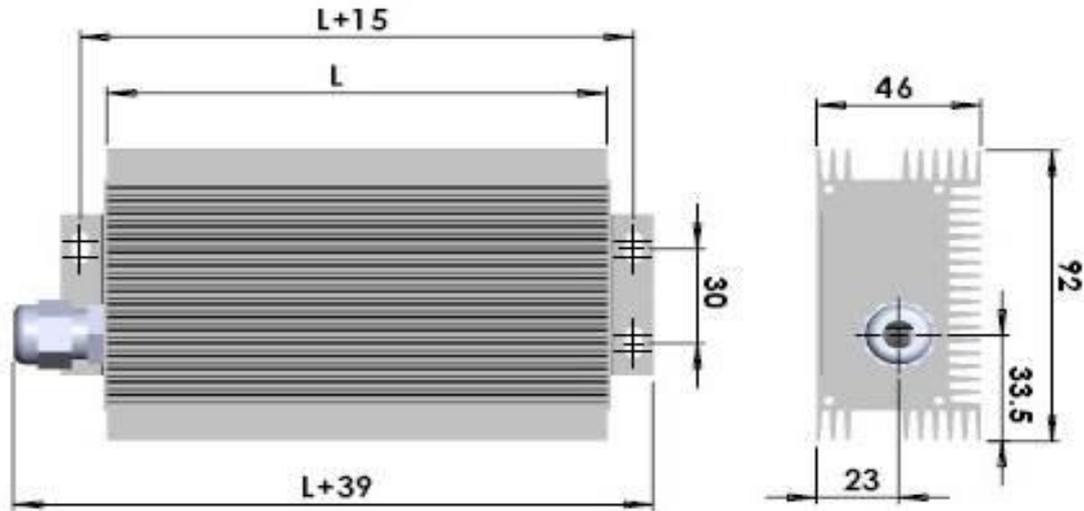

Note: L=140mm / 160mm /180mm

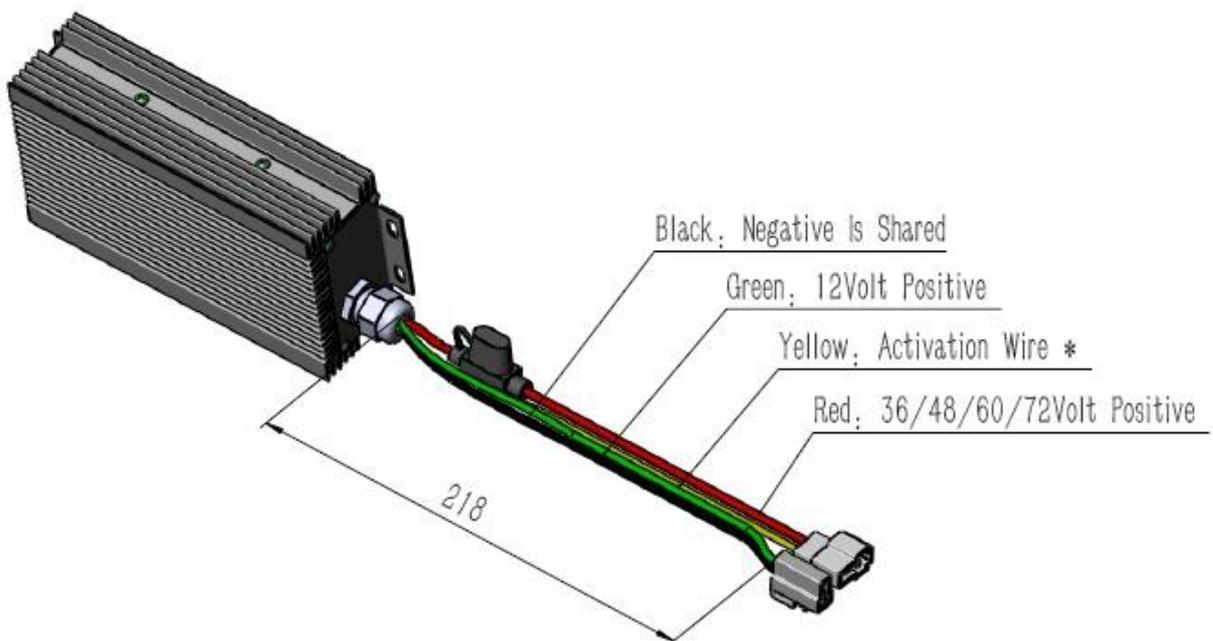

*: With Key Switch etc, to 36/48/60/72 Volts Positive

Figure 4 Installation Size

Precautions

Installation & safety instructions

- ◆ The converter must be mounted on solid metal, aluminum for heat dissipation. The converter will be very hot during use, keep wiring from touching the converter and or do not touch it !

© Copyright DCI All Rights Reserved

- ◆ Confirm battery pack main positive and negative potentials !
- ◆ For older cars using a negative through key switch you must use a relay for converter activation. Consult technical services for this application. For radio memory you must either leave the key switch in the on position or hardwire the yellow and red wire to 36/48/60/72 volt positive. Doing this you will have a constant drain on the battery pack and long extended period of “setting” will help drain the battery pack. It is advised for long storage to disconnect the converter.
- ◆ Anytime a battery pack is disconnected manufacturers instructions must be followed. Always make sure if the car has a run/tow switch the switch is placed in the tow position before disconnecting anything. Torque battery cable nuts to 80 to 100 inch pounds. Spray coat connections with anti corrosion spray. Tech Note: loose connection create heat and arcing make sure all wiring connections are clean and tight.
- ◆ Make sure all wiring is free from moving parts, sharp objects or extreme hot area's! Tie up any loose wiring
- ◆ use process equipment will pay attention to timely remove surface dust and other debris impact of heat dissipations .
- ◆ Please don't disassemble the DC-DC converter yourself . it may cause electric shock or other injuries .
- ◆ In order to avoid damaging the power cord , don't put any object on the line and place the line where it will not be stepped on . If the cord is frayed or damaged , replace it immediately

Warranty: 12 months Limited Warranty from time of delivery